

# INTERNET TELEPHONY using Auerswald Box

## A box with many options!

Example 1


DECT IP telephony using an existing PBX system

Example 2

Internet telephony (VoIP) using an existing PBX system

Example 3

Call Through for Internet telephony from a mobile phone network

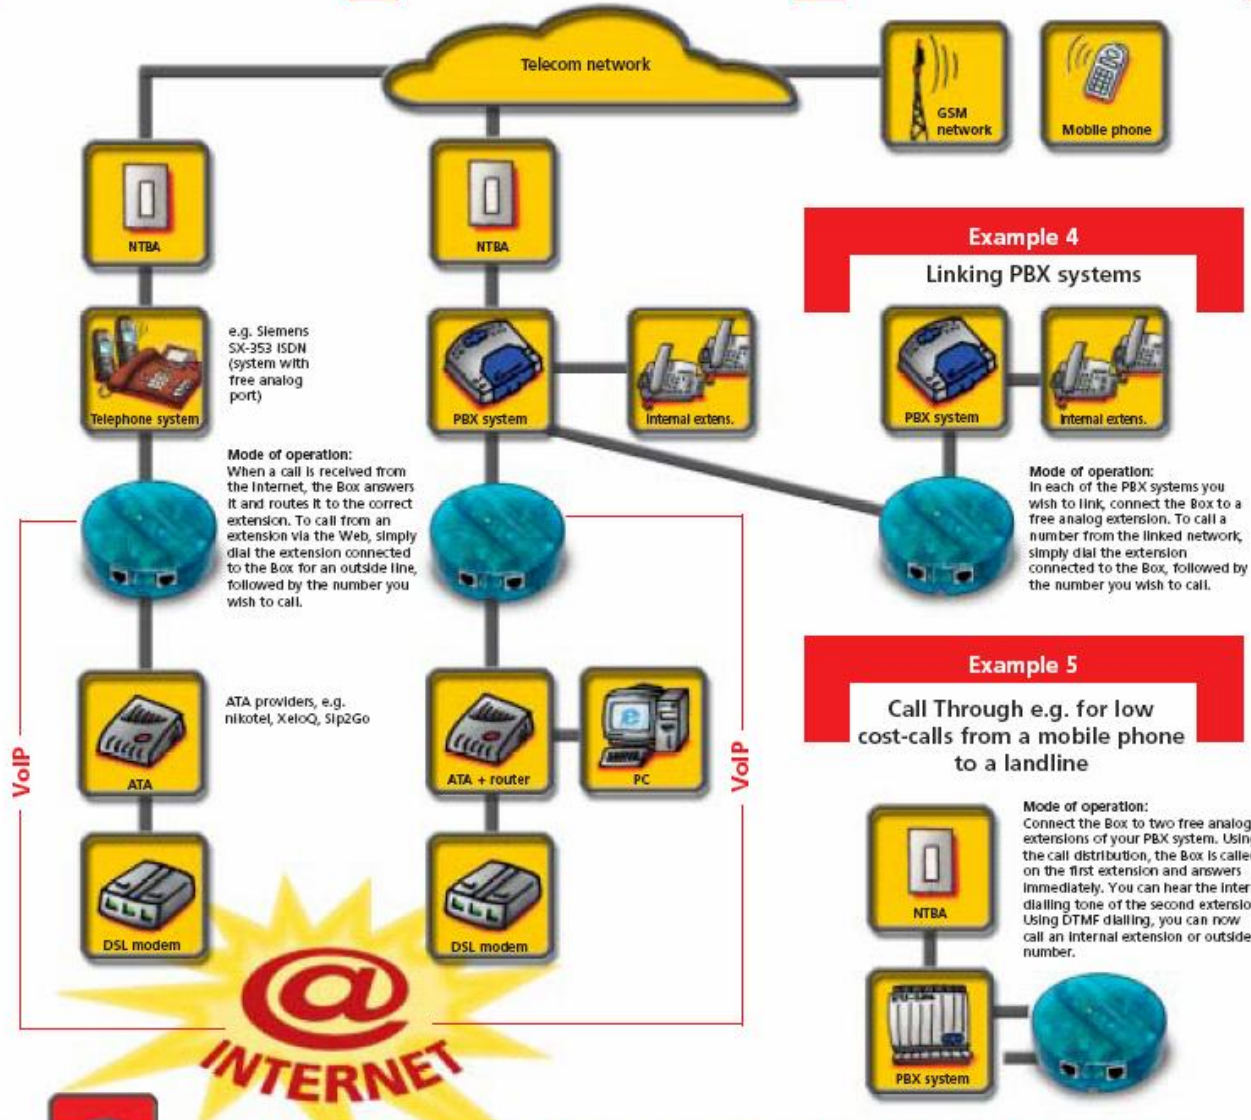

VoIP

VoIP

analog  analog **INFO:** The Auerswald Box is connected to an extension within your PBX system and to the ATA's analog port.

**Technical data:**

Operating voltage: analog port of PBX system (min. 20 mA, loop current, 20 V)  
 System connection: analog port of PBX system  
 Case: ABS, 2 parts  
 Dimensions: Ø 95 mm x 33 mm  
 Weight: app. 100 g  
 Colour: blue, translucent  
 Safety: CE

**Scope of supply:**

1 standard Auerswald Box  
 2 connection cables  
 1 instruction manual  
 Wall mount kit (wall plugs, screws, drilling template)

[www.auerswald.com](http://www.auerswald.com)

